


TRG5 - Underbody Boxes - Aluminum Single Drop Open Door


Underbody boxes are super heavy duty, high capacity and offer easy access from side of truck. Boxes can be mounted with L-Shape or Top Mount Brackets. These boxes are perfect for storing your equipment, like chains, binders, straps, tarps or your personal gear or tools. Underbody boxes are available in different sizes, and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of door
- Fully concealed rain gutter with automotive weather seal
- Lockable stainless steel adjustable T-handle latch
- Corners are gusseted for added strength and durability
- Reinforced bottom door frame
- Aircraft-type nylon coated door cable
- **Optional mirror finish 14g stainless steel door**
- Mounting kit not included
- Mounting kit available - M2200 • M2000 • M2100 Series

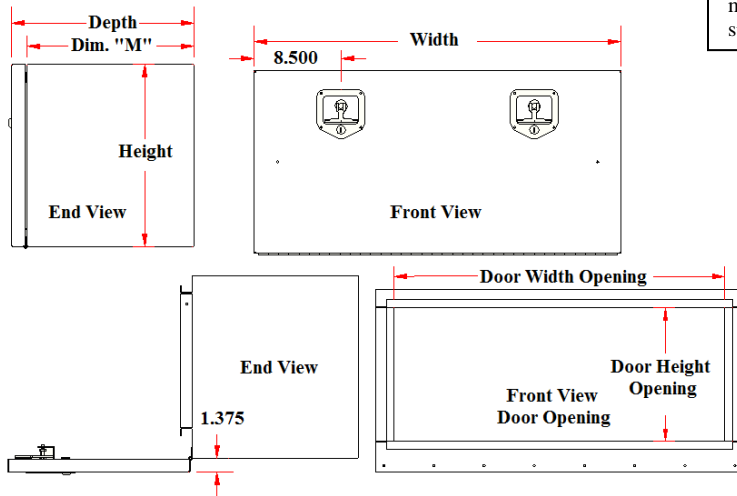

Diamond Thread Door



Note: Toolboxes less than 48 inches wide come standard with one lock only; however, we can make configuration changes if specified.



Mirror Finish Door

Note: * = Door is available in diamond thread or mirror finish; add "T" or "M" after part number where * is.

Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Dim. "M" (in.)	Door Opening Height (in.)	Door Opening Width (in.)	Weight (lb.)
ATRG5-181836SD-DO*	.125 Smooth/.100 Thread	18	18	36	16-1/4	13-1/8	32-3/8	44
ATRG5-181848SD-DO*	.125 Smooth/.100 Thread	18	18	48	16-1/4	13-1/8	44-3/8	56
ATRG5-181860SD-DO*	.125 Smooth/.100 Thread	18	18	60	16-1/4	13-1/8	56-3/8	66
ATRG5-182436SD-DO*	.125 Smooth/.100 Thread	18	24	36	22-1/4	13-1/8	32-3/8	52
ATRG5-182448SD-DO*	.125 Smooth/.100 Thread	18	24	48	22-1/4	13-1/8	44-3/8	65
ATRG5-182460SD-DO*	.125 Smooth/.100 Thread	18	24	60	22-1/4	13-1/8	56-3/8	78
ATRG5-242424SD-DO*	.125 Smooth/.100 Thread	24	24	24	22-1/4	19-1/8	20-3/8	46
ATRG5-242436SD-DO*	.125 Smooth/.100 Thread	24	24	36	22-1/4	19-1/8	32-3/8	62
ATRG5-242448SD-DO*	.125 Smooth/.100 Thread	24	24	48	22-1/4	19-1/8	44-3/8	76
ATRG5-242460SD-DO*	.125 Smooth/.100 Thread	24	24	60	22-1/4	19-1/8	56-3/8	89