

## TRG5 - Underbody Boxes - Aluminum Double Drop Open Doors

Underbody boxes are super heavy duty, high capacity and offer easy access from side of truck. Boxes can be mounted with L-Shape or Top Mount Brackets. These boxes are perfect for storing your equipment, like chains, binders, straps, tarps or your personal gear or tools. Underbody boxes are available in different sizes, and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

### Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of door
- Fully concealed rain gutter with automotive weather seal
- Lockable stainless steel adjustable T-handle latch
- Corners are gusseted for added strength and durability
- Reinforced bottom door frame
- Aircraft-type nylon coated door cable
- **Optional mirror finish 14g stainless steel door**
- Mounting kit not included
- Mounting kit available - M2200 • M2000 • M2100 Series




Diamond Thread



Optional Inset Door  
TRR5 Series



Smooth

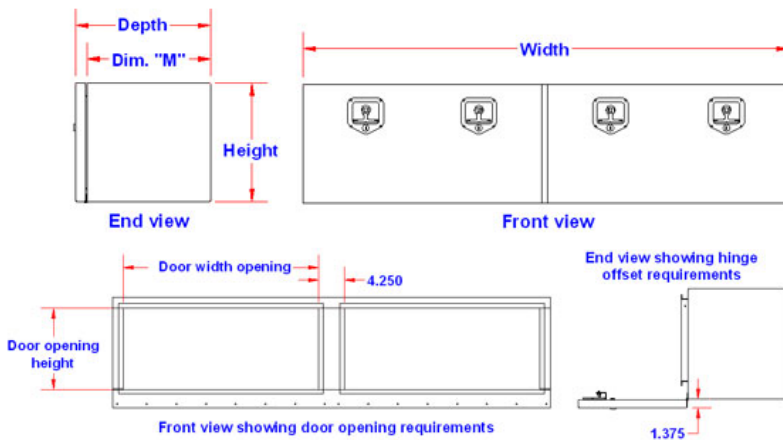

Note: Doors are available in smooth, diamond thread or mirror finish; end part number with "S", "T" or "M" for finishes

| Model Number        | Material                | Height (in.) | Depth (in.) | Width (in.) | Dim. "M" (in.) | Door Opening Height (in.) | Door Opening Width (in.) | Weight (lb.) |
|---------------------|-------------------------|--------------|-------------|-------------|----------------|---------------------------|--------------------------|--------------|
| ATRG5-181872DD-DOT  | .125 smooth/.100 thread | 18           | 18          | 72          | 16-1/4         | 13-1/8                    | 32                       | 79           |
| ATRG5-181884DD-DOT  | .125 smooth/.100 thread | 18           | 18          | 84          | 16-1/4         | 13-1/8                    | 38                       | 90           |
| ATRG5-181896DD-DOT  | .125 smooth/.100 thread | 18           | 18          | 96          | 16-1/4         | 13-1/8                    | 44                       | 100          |
| ATRG5-1818120DD-DOT | .125 smooth/.100 thread | 18           | 18          | 120         | 16-1/4         | 13-1/8                    | 56                       | 124          |
| ATRG5-182496DD-DOT  | .125 smooth/.100 thread | 18           | 24          | 96          | 22-1/4         | 13-1/8                    | 44                       | 118          |
| ATRG5-1824120DD-DOT | .125 smooth/.100 thread | 18           | 24          | 120         | 22-1/4         | 13-1/8                    | 56                       | 142          |
| ATRG5-181872DD-DOS  | .125 Smooth             | 18           | 18          | 72          | 16-1/4         | 13-1/8                    | 32                       | 82           |
| ATRG5-181884DD-DOS  | .125 Smooth             | 18           | 18          | 84          | 16-1/4         | 13-1/8                    | 38                       | 93           |
| ATRG5-181896DD-DOS  | .125 Smooth             | 18           | 18          | 96          | 16-1/4         | 13-1/8                    | 44                       | 104          |
| ATRG5-1818120DD-DOS | .125 Smooth             | 18           | 18          | 120         | 16-1/4         | 13-1/8                    | 56                       | 127          |
| ATRG5-182496DD-DOS  | .125 Smooth             | 18           | 24          | 96          | 22-1/4         | 13-1/8                    | 44                       | 121          |
| ATRG5-1824120DD-DOS | .125 Smooth             | 18           | 24          | 120         | 22-1/4         | 13-1/8                    | 56                       | 147          |