

## TS – Tank Auxiliary Service - Steel or Aluminum


Tanks are heavy duty, and offer auxiliary supply for water, diesel, oil and/or bio fuels. Tanks can be mounted on, truck, flatbed and trailer. Tanks are available in different sizes, and can be ordered custom size. It is the user's responsibility to comply with local, state and federal requirements pertaining to safe transportation, loading and discharging of tank contents. **These tanks are not intended to be used for gasoline or cannot be used to transfer gasoline to another vehicle.** All AMERICAN TRUCKBOXES tanks are designed and built to a quality you respect.

### Description


- An engineered steel or aluminum construction
- Fully seam welded on all seams and corners
- Built-in baffle(s) reduces sloshing in larger tanks
- 2" female pipe thread couplings - inside reinforced
- 3/4" top fitting and 3/8" bottom drain
- Pressure tested for leaks
- Powder coated baked-on finish, steel tanks
- Mounting brackets tabs
- Diesel fuel kits available – use FTIK series
- Mounting kit not included - M3712-TMK or M3715-TMK




TFC20-SF-T  
TFA20-SF-T

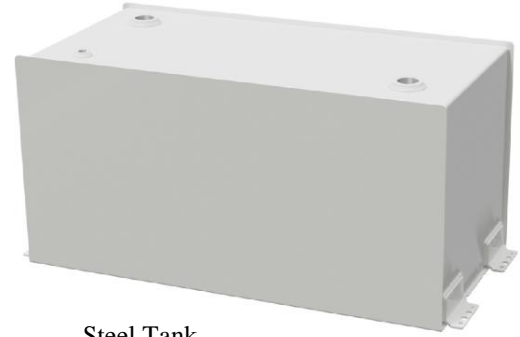

Steel Tank

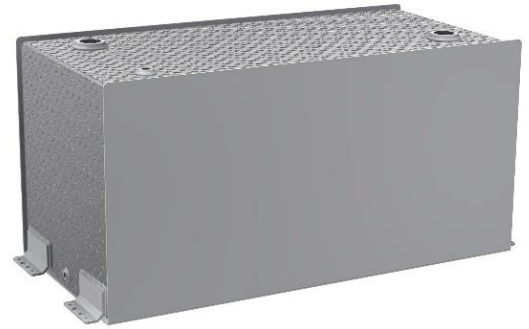

Aluminum Tank

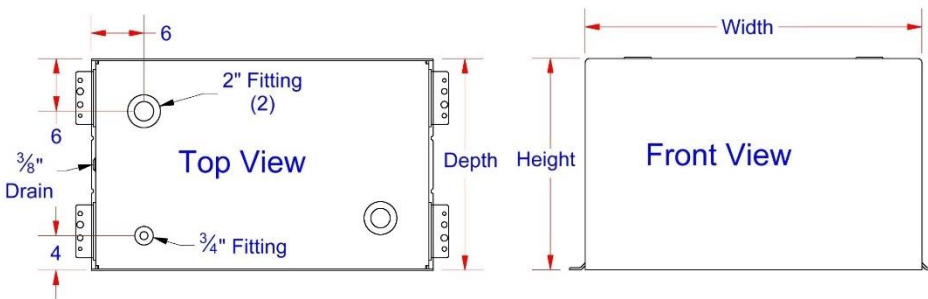

**Note: Tanks are to be mounted as per our mounting installation guide. Failure to properly mount tank will void warranty. For mounting tanks use M3700 series mounting kits.**

Note: \* Tanks are available in black and white, add "b" for black and "w" for white after part number.

Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Mounting Kit	Capacity (Gal.)	Weight (lb.)
STS4-181424-NB-*2	14 Gauge Steel	18	14	24	M3712	24	60
STS4-181836-NB-*2	14 Gauge Steel	18	18	36	M3712	47	98
STS5-181554-SB-*2	12 Gauge Steel	18	15	54	M3712	59	177
STS5-182154-SB-*2	12 Gauge Steel	18	21	54	M3712	83	220
STS5-182554-SB-*2	12 Gauge Steel	18	25	54	M3715	99	250
STS5-242854-DB-*2	12 Gauge Steel	24	28	54	M3715	147	318
STS5-243854-TB-*2	12 Gauge Steel	24	38	54	M3715	200	440
STS6-243854-TB-*2	10 Gauge Steel	24	38	54	M3715	200	560
ATS5-181424-NB-T2	.125 Smooth/.125 Thread	18	14	24	M3712	24	48
ATS5-181836-NB-T2	.125 Smooth/.125 Thread	18	18	36	M3712	47	81
ATS5-181554-SB-T2	.125 Smooth/.125 Thread	18	15	54	M3712	59	114
ATS5-182154-SB-T2	.125 Smooth/.125 Thread	18	21	54	M3712	83	141
ATS5-182554-SB-T2	.125 Smooth/.125 Thread	18	25	54	M3715	99	160
ATS6-242854-DB-T2	.187 Smooth/.187 Thread	24	28	54	M3715	147	310
ATS6-243854-TB-T2	.187 Smooth/.187 Thread	24	38	54	M3715	200	398

Note: Tanks are available in different configuration and custom sizes; call the factory for different sizes and options.