


## IFB5 - In-Frame Boxes - Aluminum Single Top Open Lid

In-Frame boxes are super heavy duty, high capacity and offer easy access from back of the truck. Boxes are available with Padlock or T-Handle Lock. Boxes are perfect for standing on when changing trailer connections or a perfect way to store your equipment, like chains, binders, straps or your personal gear. In-Frame boxes are available in different sizes, ranging from 12" to 48" or can be ordered in custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

### Description


- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel continuous hinge on full length of lid
- Channel brace reinforced lid serves as a platform
- Pad lockable adjustable latch
- Optional stainless steel T-handle latch
- Optional stainless steel T-handle cover – 1A060-C or 1A060-C1 Newer
- Automotive type weather seal
- Batteries – Boxes are available to install batteries – special order
- Mounting kit included – M3100F

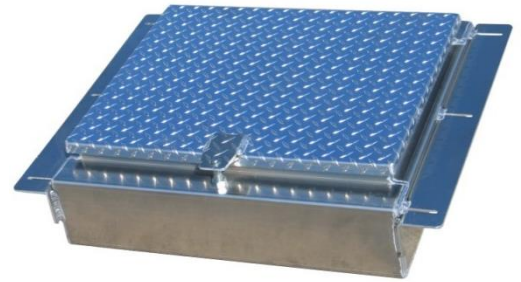


AIFB5B = Pad Lock locking



AIFB5T = T-Handle locking

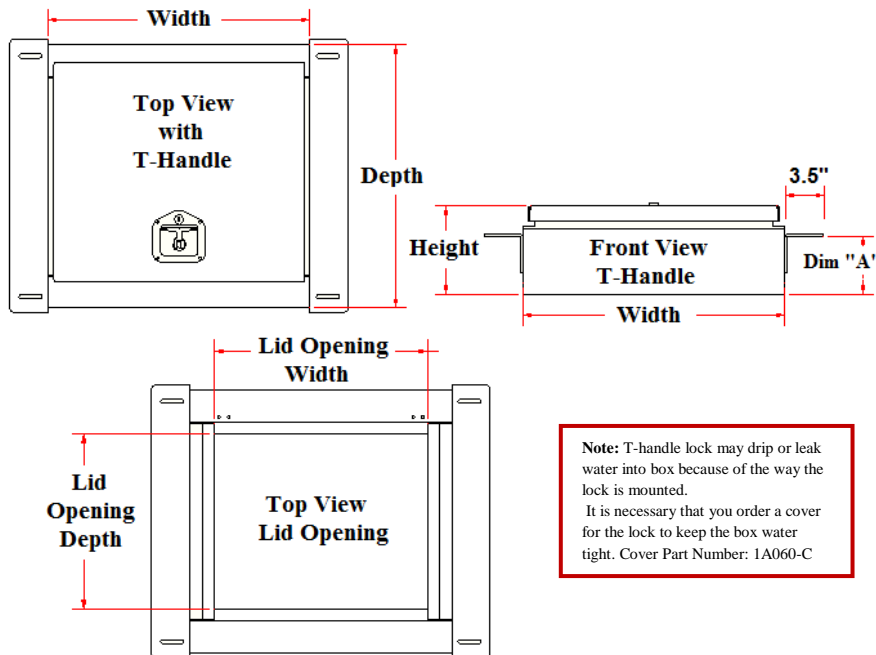

**Note:** T-handle lock may drip or leak water into box because of the way the lock is mounted.  
It is necessary that you order a cover for the lock to keep the box water tight. Cover Part Number: 1A060-C

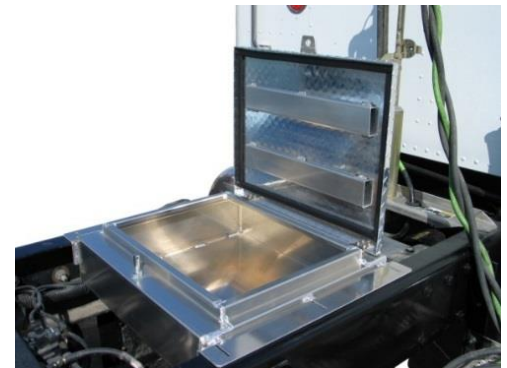

Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Dim "A" (in)	Door Opening Depth (in.)	Door Opening Width (in.)	Weight (lb.)
AIFB5B-81824SL-TOT	.125 Smooth/.100 Thread	8	18	24	5-3/8	10	19-1/2	30
AIFB5B-82424SL-TOT	.125 Smooth/.100 Thread	8	24	24	5-3/8	16	19-1/2	36
AIFB5B-102224SL-TOT	.125 Smooth/.100 Thread	10	22	24	7-3/8	14	19-1/2	36
AIFB5B-103624SL-TOT	.125 Smooth/.100 Thread	10	36	24	7-3/8	28	19-1/2	52
AIFB5T-81824SL-TOT	.125 Smooth/.100 Thread	8	18	24	5-3/8	10	19-1/2	30
AIFB5T-82424SL-TOT	.125 Smooth/.100 Thread	8	24	24	5-3/8	16	19-1/2	36
AIFB5T-102224SL-TOT	.125 Smooth/.100 Thread	10	22	24	7-3/8	14	19-1/2	36
AIFB5T-103624SL-TOT	.125 Smooth/.100 Thread	10	36	24	7-3/8	28	19-1/2	52